




LONGITUDINAL SECTION

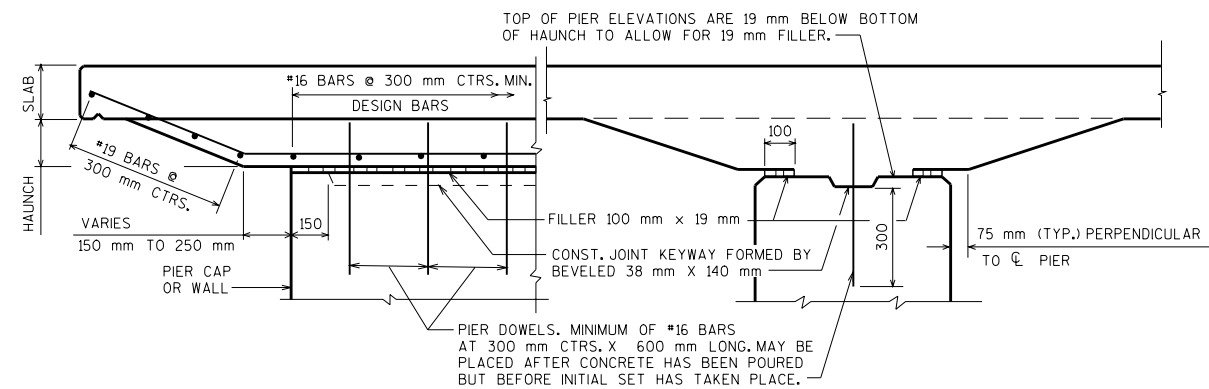


PIER CAP OR WALL TYPE PIER
SHOWING TRANSVERSE TAPERED HAUNCH

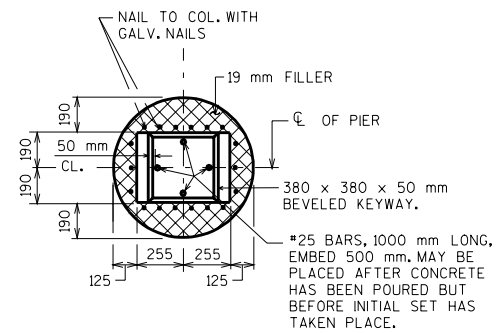

COLUMN W/O CAP TYPE PIER
DETAIL AT TOP OF COLUMN

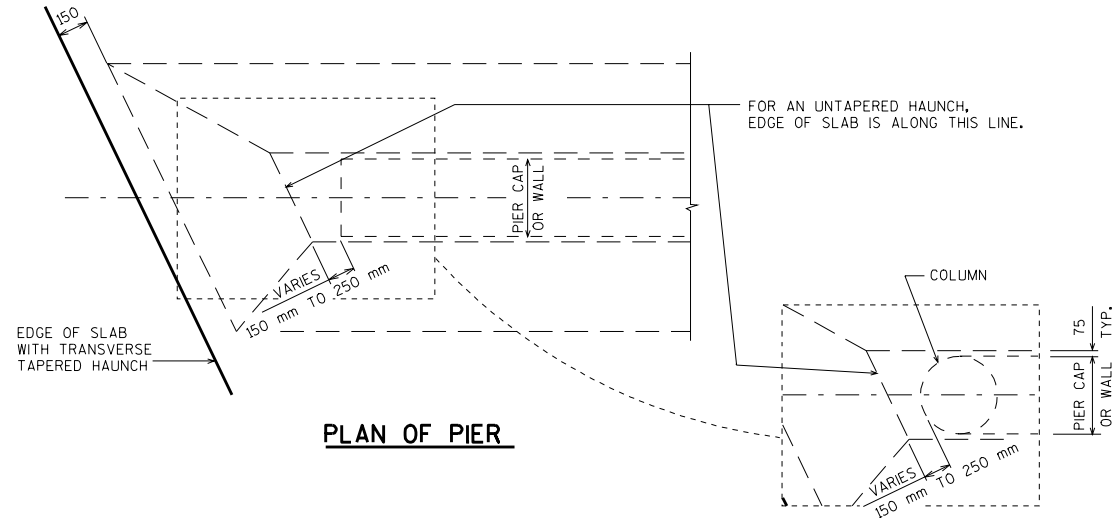

PLAN OF PIER

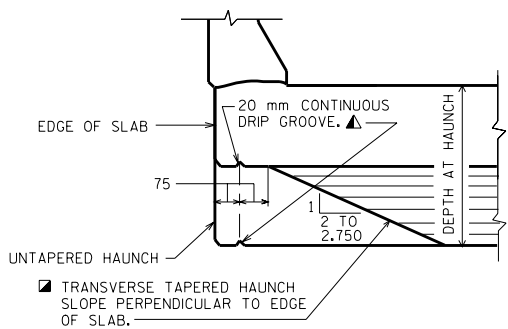

TAPERED/UNTAPERED HAUNCH
CROSS SECTION

NOTES

TOP TRANSVERSE BARS IN SLAB SHALL BE SUPPORTED BY INDIVIDUAL BAR CHAIRS AT APPROXIMATELY 900 mm CENTERS EACH WAY. BOTTOM LONGITUDINAL BARS SHALL BE SUPPORTED BY CONTINUOUS BAR CHAIRS AT APPROXIMATELY 1200 mm CENTERS.

ALL SLAB THICKNESS DIMENSIONS ARE MINIMUM. ANY TOLERANCES NECESSARY TO CORRECT CONSTRUCTION DISCREPANCIES ARE TO BE PLUS (+).

PARAPETS SHOWN ABOVE THE HORIZONTAL CONSTRUCTION JOINT SHALL BE POURED AFTER FALSEWORK HAS BEEN RELEASED EXCEPT FOR STAGE CONSTRUCTION.

CAMBER SPANS AS SHOWN TO PROVIDE FOR DEAD LOAD DEFLECTION & FUTURE CREEP. CAMBER DOES NOT INCLUDE ALLOWANCE FOR FORM SETTLEMENT.

▲ 20 mm CONTINUOUS DRIP GROOVE TO END 600 mm AWAY FROM FACE OF ABUTMENT.

ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SHOWN.

DESIGNER NOTES

THE MAXIMUM ALLOWABLE SKEW ANGLE OF STRUCTURE SHALL BE 30°.

ALL BAR SPLICES TO BE BASED ON "CLASS C" TENSION LAP SPLICE.

USE OPTIONAL LONGITUDINAL JOINTS WHEN ROADWAY WIDTH IS OVER 16000 mm. SEE STANDARD 18.2 FOR DETAIL.

FOR BRIDGES LOCATED IN REMOTE AREAS USE OPTIONAL TRANSVERSE JOINT WHEN POUR EXCEEDS 300 cu. m. PLACE KEYED JOINT NEAR POINT OF DEAD LOAD INFLECTION.

ALL TRANSVERSE BAR STEEL REINFORCEMENT SHALL BE PLACED ON THE SKEW.

FLOOR DRAINS ARE TO BE OMITTED FROM THESE UNITS WHERE POSSIBLE. IF FLOOR DRAINS ARE REQ'D., PLACE ONLY AT THE 2/10 & 8/10 PTS. BEND MAIN REBARS PAST DRAINS - DO NOT CUT.

■ TRANSVERSE TAPERED HAUNCHES MAY BE USED TO ELIMINATE A COLUMN (PROVIDED A MINIMUM OF 3 COL'S. ARE USED), OR FOR AESTHETICS.

PIER CAP OR WALL TYPE PIERS SHALL BE USED ON MOST STRUCTURES. COLUMN W/O CAP TYPE PIERS MAY BE USED WITH THE APPROVAL OF THE STRUCTURES DESIGN SECTION.

CONTINUOUS
HAUNCHED SLAB

STATE OF WISCONSIN
DEPARTMENT OF TRANSPORTATION
STRUCTURES DEVELOPMENT SECTION

APPROVED: _____

DATE:
7/99